



DPX-NF0816-SB

## LED NEONFLEX SIDE BEND

### Luminaire Information

System power	7W / 12W
CCT	2200K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K / RGBW / TUNABLE CCT
CRI / Ra	±90Ra
Fixture lumen output	90lm, 93lm, 94lm, 95lm, 97lm
Material	PCB
Beam angle	160°
IP rate	IP67


### Light Engine Information

LED type	SMD (Bridgelux)
SDCM	2 SDCM / 3 SDCM


### Driver Information

Driver type	Remote
Input voltage	12 VDC / 24VDC
Dimming system	ON-OFF / TRIAC / 1-10V / DALI

### Product Dimension

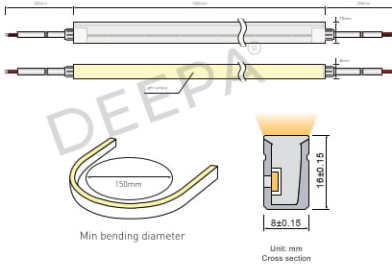

### Accessories

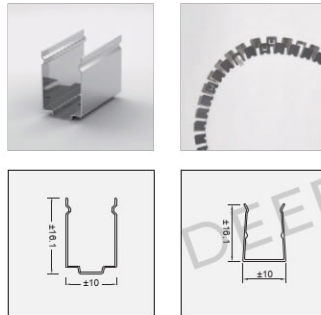

MOUNTING CLIPS      CURVED ALUMINUM PROFILE

### Light Throw

