



DP-2835-SMD

## LED STRIPLIGHT SMD REGULAR CCT

### Luminaire Information

System power	4.8W / 7W / 12W / 14W
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI / Ra	±90Ra
Fixture lumen output	1080lm, 1110lm, 1134lm, 1144lm, 1164lm
Material	PCB
Beam angle	160°
IP rate	IP20, IP67


### Light Engine Information

LED type	SMD (Bridgelux)
SDCM	2 SDCM / 3 SDCM

### Driver Information

Driver type	Remote
Input voltage	12VDC / 24VDC
Dimming system	ON-OFF / TRIAC / 1-10V / DALI

### Product Dimension

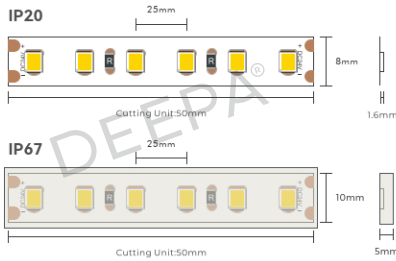

### Light Throw

